


電器開關箱/操作控制箱 尺寸圖表



SDEC-R1系列(耐壓鋁合金)

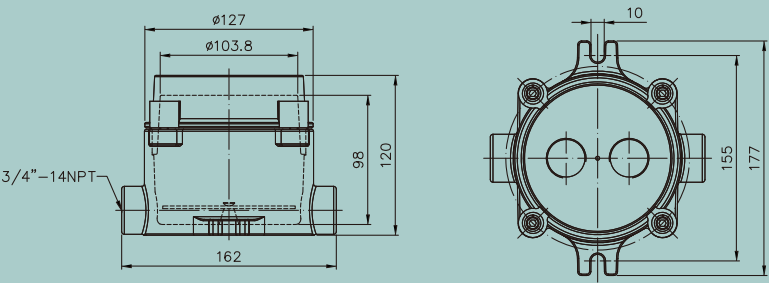

可開至兩孔搭元件


位置標示圖

- A/D:外型/內部長邊尺寸
- B/E:外型/內部寬邊尺寸
- C/F:外型/內部高度尺寸
- G:固定孔中心長邊距離
- H:固定孔中心寬邊距離
- J:固定孔尺寸
- L:底板長邊距離
- W:底板寬邊距離
- t:底板厚度




SDEC-O系列(耐壓鋁合金)

SDEC-O系列標示圖

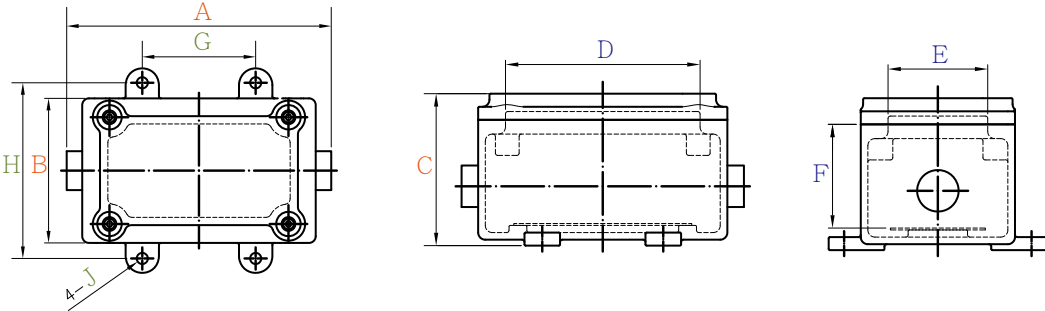

代碼	外型/內部尺寸(mm)			安裝尺寸(mm)			底板尺寸(mm)		
	A/D	B/E	C/F	G	H	J	L	W	t
1	120/66	86/53	87/45	140	66	Ø8	70	50	2
01	172/126	130/84	128/87	85	158	Ø10	120	80	2
02	210/164	130/84	128/87	102	158	Ø10	155	80	2
03	259/213	130/84	128/87	131	158	Ø10	210	70	2
04	354/308	130/84	128/87	176	158	Ø10	300	70	2

SEEJ系列標示圖

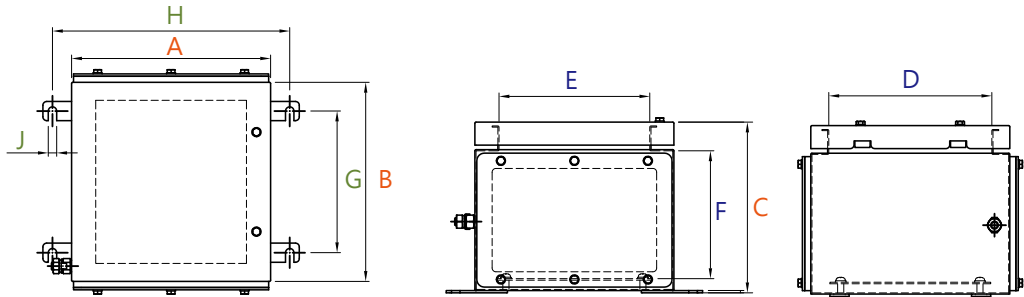

	A/D	B/E	C/F	G	H	J	L	W	t
20	260/213	260/197	223/167	185	310	11	210	203	2
21	306/259	306/243	223/167	231	356	11	255	249	2
22	380/333	260/197	223/167	305	310	11	330	203	2
23	430/383	430/367	223/167	355	480	11	380	373	2
24	480/433	480/417	223/167	405	530	11	430	423	2
25	520/473	520/457	223/167	445	570	11	470	463	2
26	620/573	450/387	223/167	545	500	11	570	393	2
27	762/715	508/445	223/167	687	558	11	712	451	2
28	914/867	610/547	318/262	839	660	11	864	553	2
29	1177/1130	777/714	318/262	551	827	11	1127	720	2


SEEJ系列(安增不銹鋼)




Line ID:
@sanacs.com

三左興業股份有限公司


San Tzuoo Corporation Limited

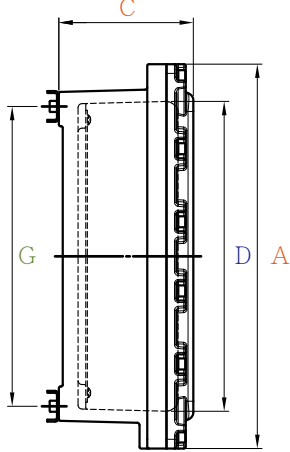



SDEC系列標示圖

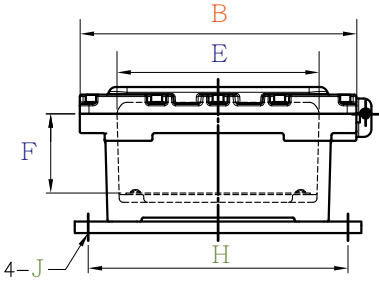

SDEC-5系列(耐壓鋁合金)



SEEC系列標示圖

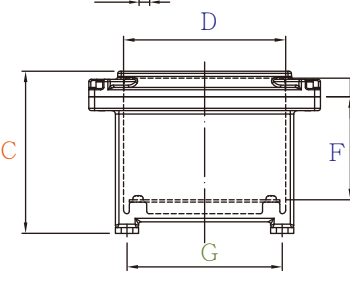

代碼	外型/內部尺寸(mm)			安裝尺寸(mm)			底板尺寸(mm)		
	A/D	B/E	C/F	G	H	J	L	W	t
98	370/301	193/124	130/87	180	170	Ø10	285	110	2
50	380/285	300/205	200/132	272	278	Ø15	270	190	2
51	480/370	370/260	270/198	345	320	Ø15	340	235	2
52	500/403	360/263	175/103	390	338	Ø15	380	240	2
53	530/410	430/310	300/208	380	405	Ø15	385	285	2
54	580/454	580/454	340/241	440	555	Ø15	430	430	2
55	680/554	480/354	270/171	535	455	Ø15	520	320	2
56	680/554	580/454	320/221	530	555	Ø15	520	420	2
57	870/725	700/555	430/306	700	665	Ø15	660	490	2



SDEC-7系列(耐壓不銹鋼)

	A/D	B/E	C/F	G	H	J	L	W	t
70	360/260	260/160	211/174	234	220	Ø10	235	135	2
72	480/370	370/260	226/171	352	328	Ø10	355	245	2
73	500/390	400/290	320/261	410	350	Ø16.5	375	275	2
74	600/480	600/480	323/257	410	602	Ø16.5	450	450	2
75	800/680	620/500	260/207	490	622	Ø16.5	650	470	2



SEEC系列(安增鋁合金)

	A/D	B/E	C/F	G	H	J	L	W	t
10	200/140	160/100	135/89	134	155	Ø10	130	90	2
11	250/190	160/100	135/89	184	155	Ø10	180	90	2
12	300/240	160/100	135/89	234	155	Ø10	230	90	2
13	380/320	160/100	135/89	314	155	Ø10	310	90	2
14	400/330	260/190	205/151	320	250	Ø14	310	170	2
15	400/330	400/330	255/201	320	390	Ø14	310	310	2
16	560/490	360/290	255/201	480	350	Ø14	470	270	2
39	370/294	356/280	233/169	290	350	Ø14	280	265	2
99	1050/974	850/774	325/266	460	838	Ø14	958	758	2 (H:12)

矩形窗口適用選擇(長*寬)									
代號	視窗大小	5 0	5 1	5 2	5 3	5 4	5 5	5 6	5 7
W1	L95*W50mm	✓	✓	✓	✓	✓	✓	✓	✓
W2	L105*W75mm	✓	✓	✓	✓	✓	✓	✓	✓
W3	L120*W108mm			✓	✓	✓	✓	✓	✓
W4	L150*W100mm			✓	✓	✓	✓	✓	✓
W5	L210*W140mm						✓	✓	✓

開窗箱子適用:SDEC鋁合金系列。
提醒您:各項產品尺寸若有誤差皆以實品量測值為準

DC24V
紅:S-SP-EC0400-006
綠:S-SP-EC0400-007
藍:S-SP-EC0400-008
橙:S-SP-EC0400-009
透:S-SP-EC0400-010
白:S-SP-EC0400-018
灰:S-SP-EC0400-019

110V
紅:S-SP-EC0400-001
綠:S-SP-EC0400-002
藍:S-SP-EC0400-003
橙:S-SP-EC0400-004
透:S-SP-EC0400-005
白:S-SP-EC0400-016
灰:S-SP-EC0400-021

220V
紅:S-SP-EC0400-011
綠:S-SP-EC0400-012
藍:S-SP-EC0400-013
橙:S-SP-EC0400-014
透:S-SP-EC0400-015
白:S-SP-EC0400-017
灰:S-SP-EC0400-020

一般型
紅 S-SP-EC0300-001
綠:S-SP-EC0300-002
藍:S-SP-EC0300-003
橙:S-SP-EC0300-004
白:S-SP-EC0300-005
黑:S-SP-EC0300-006

插梢型
紅:S-SP-EC0300-007
綠:S-SP-EC0300-008
藍:S-SP-EC0300-009
橙:S-SP-EC0300-010
白:S-SP-EC0300-011
黑:S-SP-EC0300-012

多段式選擇開關
三段式45°:S-SP-EC0700-001
二段式90°:S-SP-EC0700-002
接點配套
3316:1-EL1098-000011
3317:1-EL1098-000012
2220:1-EL1098-000013



蜂鳴器
S-SP-EC1100-001

大頭壓扣開關
S-SP-EC0100-101

箱用配件 黃銅元件

※尺寸許可差 ±5%
※尺寸公差依實際產品量測為準

多段式選擇開關

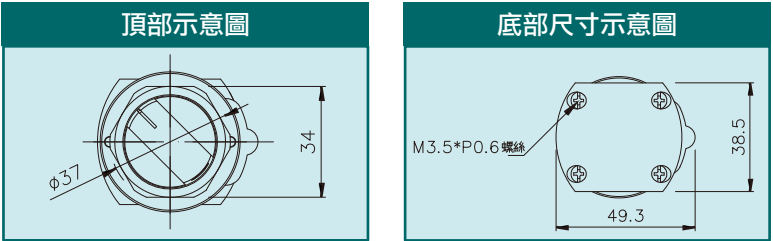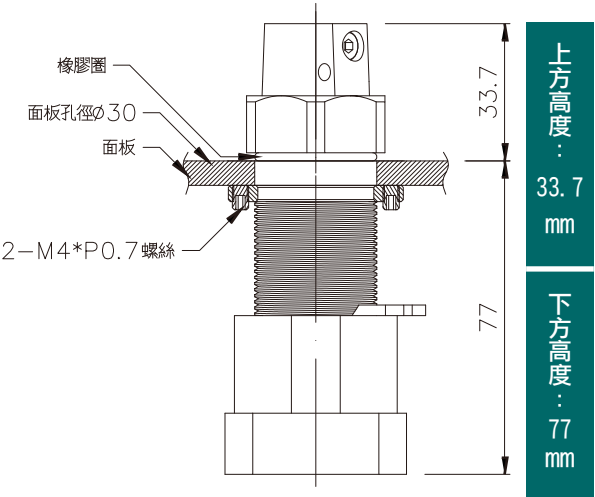

2段式選擇開關 (ON/OFF) 3A接點	3段式選擇開關 1 Φ 馬達正逆轉	3段式選擇開關 3 Φ 馬達正逆轉
2220(0 3A) 	3316(1ΦF.O.R) 	3317(3ΦF.O.R)
2段/3段式選擇開關接點圖		



Capacity Voltage	AC-3A(kw)		AC-23A(kw)		AC-21A lu=lth	Motor	AC-3A(hp)	
	3 ph.	1 ph.	3 ph.	1 ph.			3 ph.	1 ph.
220~240VAC	4	3	5.5	3	25A	120V	3	1.5
380~440VAC	7.5	3.7	11	5.5		240V	7.5	3
660~690VAC	7.5	3.7	11	5.5		480V	10	3

多段式選擇開關，請依據段式/馬達種類/電壓規格做挑選，
歡迎使用官方賴管道直接線上向業務員諮詢。


箱用配件 黃銅元件

※尺寸許可差 ±5%
※尺寸公差依實際產品量測為準


LED
指示燈

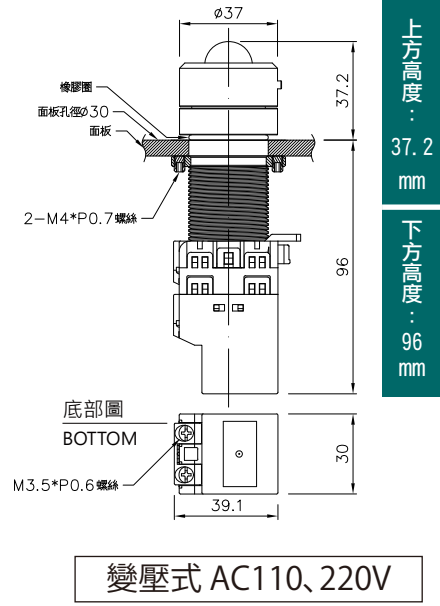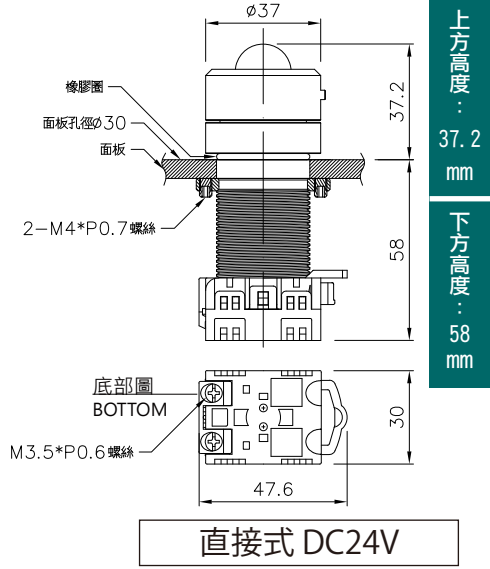


蜂鳴器

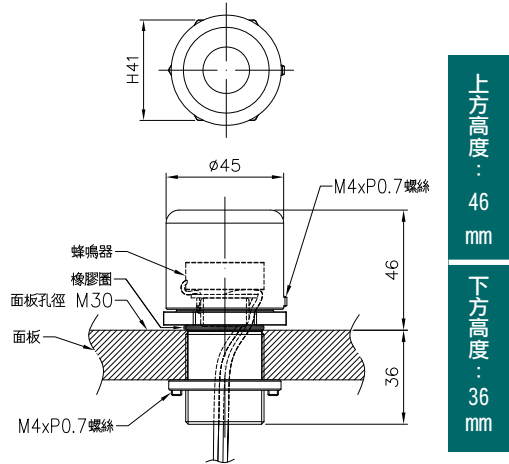


大頭壓扣開關

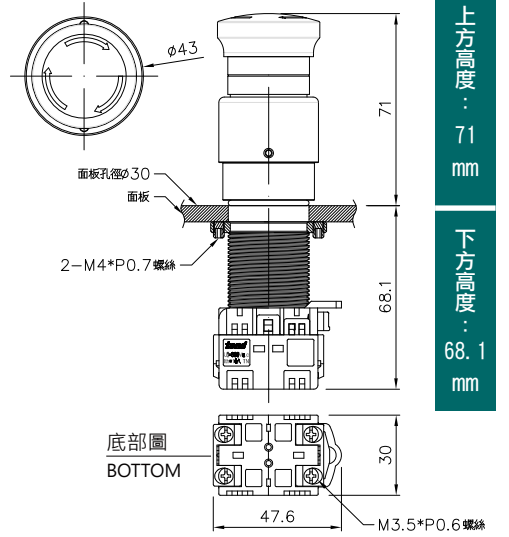

平頭開關按鈕

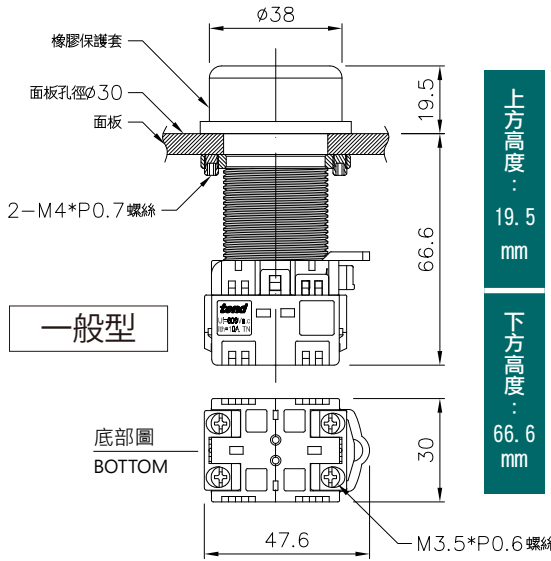

平頭附插梢按鈕

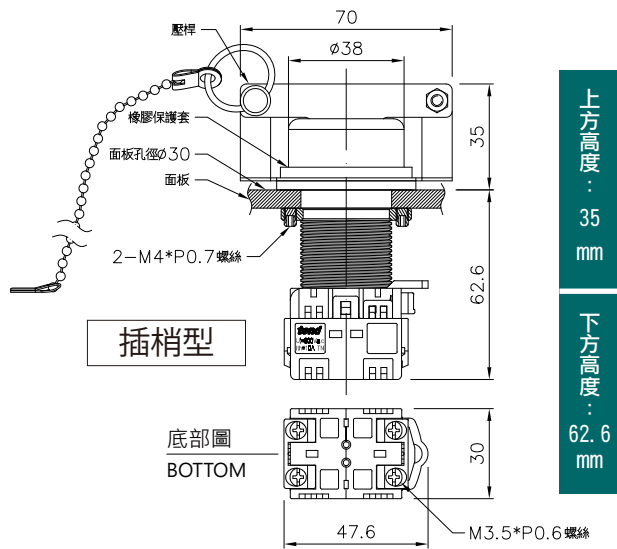

· 接點額定值

適用元件(標示 ★ 號者)

交流電	AC11 電感負載	AC24V	AC110V	AC220V	AC380V	AC440V	直 流 電	DC11 電感負載	DC24V	DC110V	DC220V	DC380V
		10A	6A	4A	2.5A	2A			1.5A	0.5A	0.2A	0.1A
	電阻負載	10A	10A	6A	5A	4A		DC14 電阻負載	10A	2A	0.6A	0.2A